


Plastic and steel strapping tools



Technical Catalogue



Advanced strapping
technology, since 1970

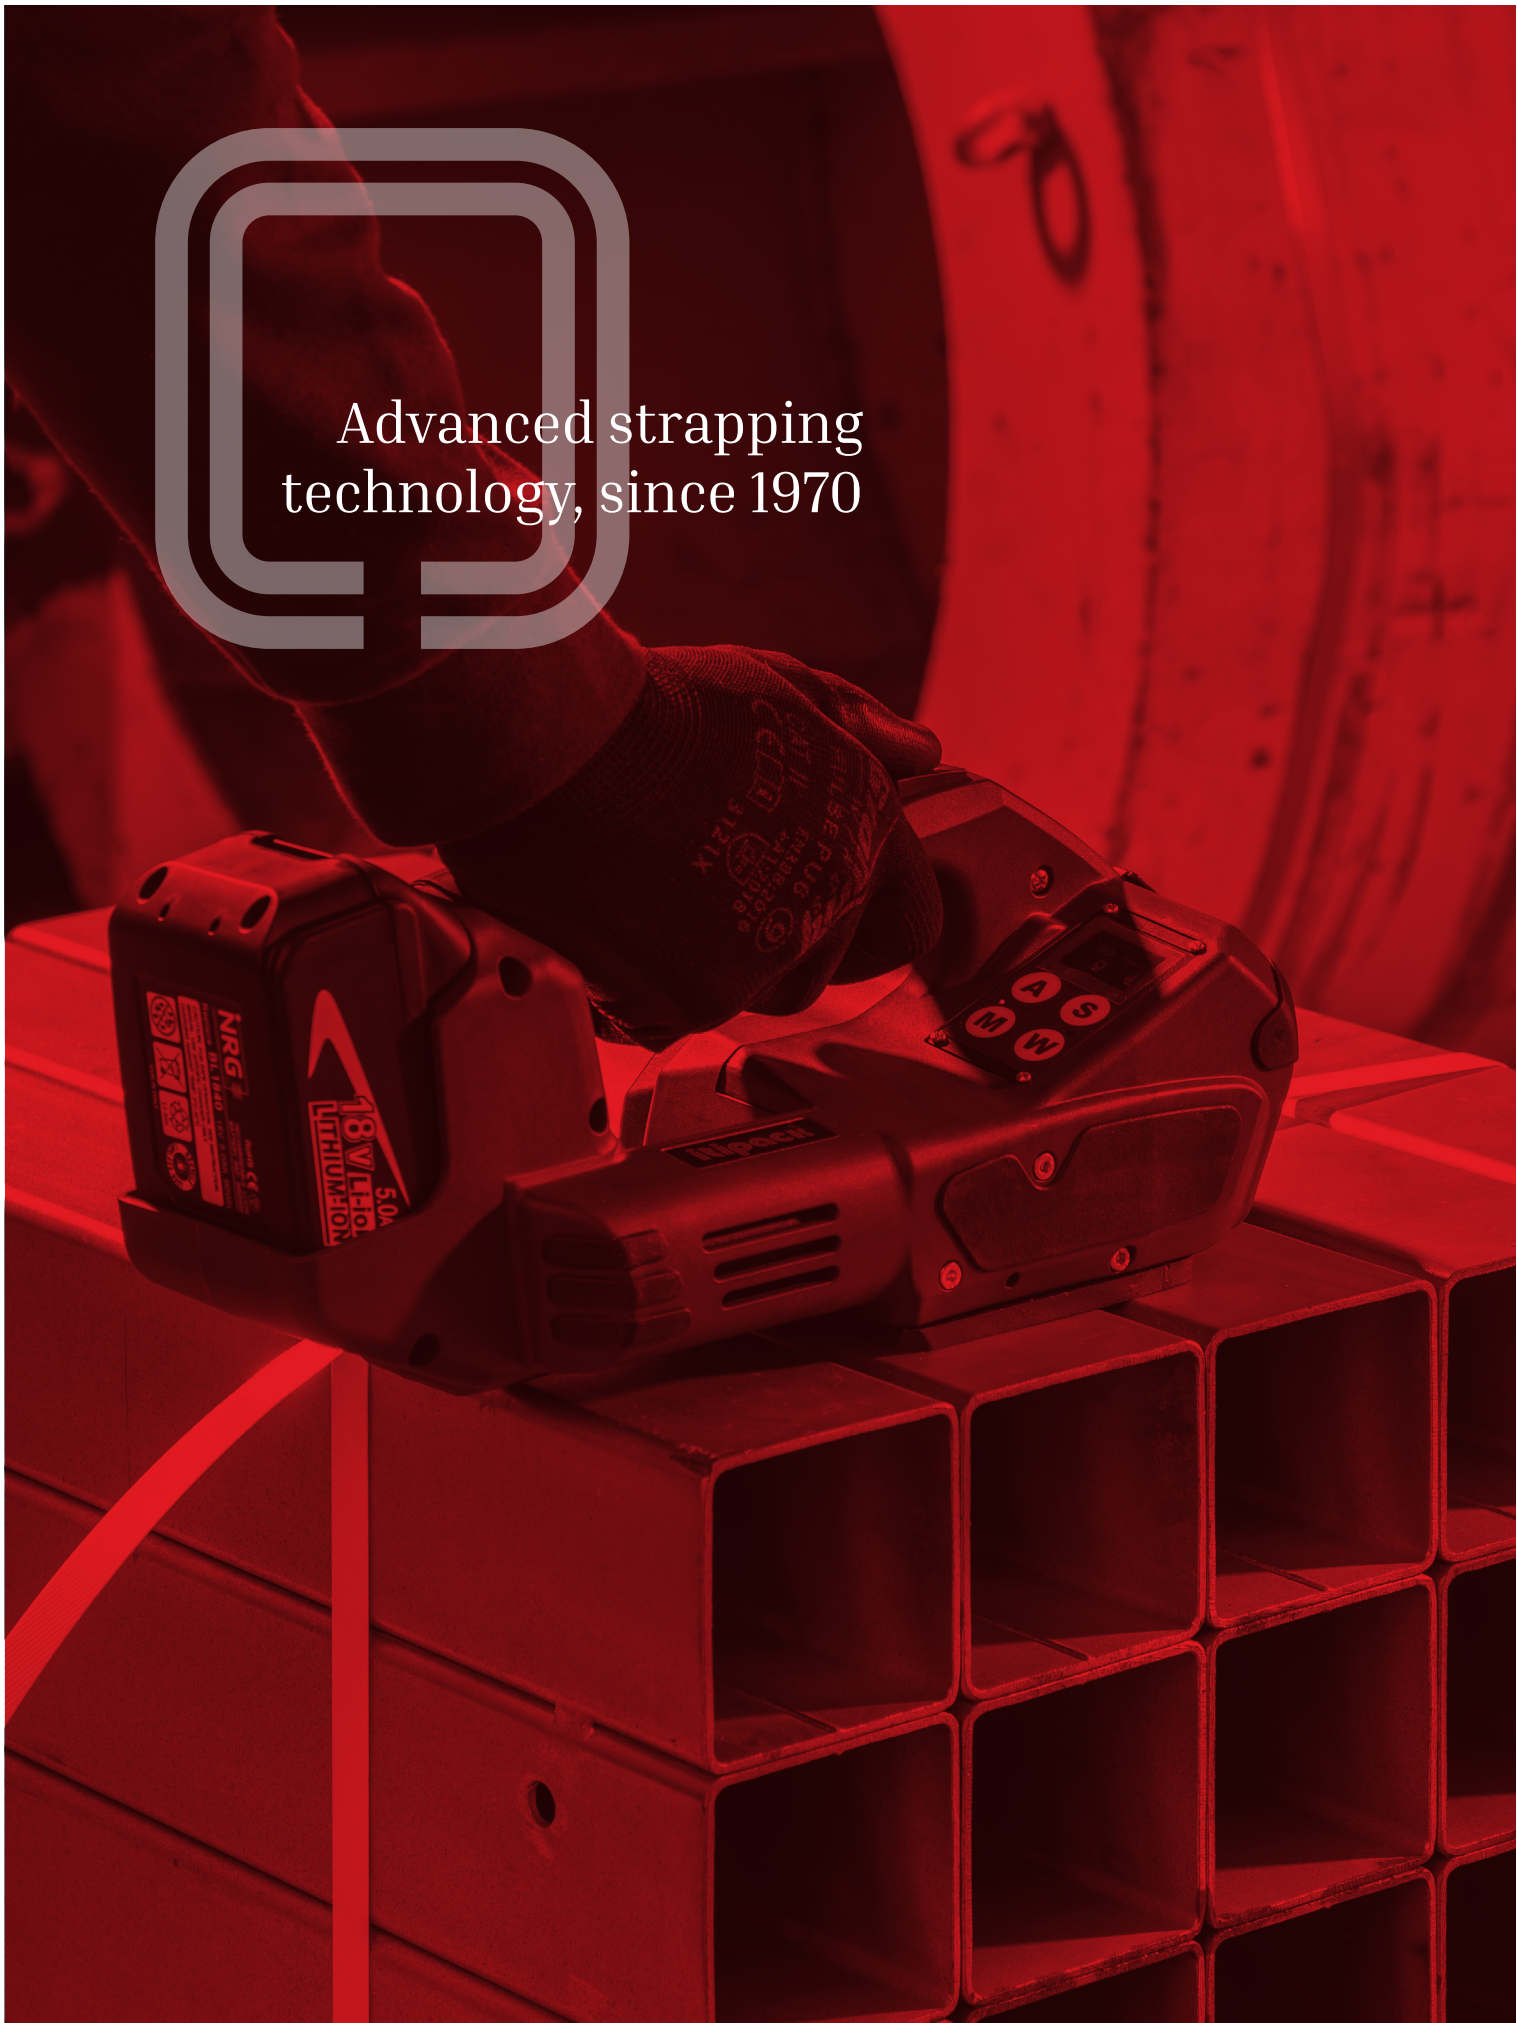


Index

PP & PET	Battery strapping tools for PP & PET strap	ITI EVO 13-16	pag. 5
	Fully automatic battery tools for PP & PET strap	ITI 24 - 25 - 27	pag. 6 - 7
	Entry level battery tool	ITI 20 - 21 - 23	pag. 8 - 9
	Pneumatic strapping tools for PP & PET strap	ITI 10 - 11 - 12 - 14 - 18	pag. 12 - 13
STEEL	Combined pneumatic strapping tools for steel strap	ITI 40 - 41 - 42 - 51 - 52 - 61 - 62	pag. 14 - 15
	Pneumatic tensioners and sealers for steel strap	ITI 44 - 44SP - 45 - 84 - 84SP - 85	pag. 16 - 17
	Manual tools for steel strap	ITI 30 - 36 - 37	pag. 18
TEXTILE	Tensioners	ITI 70 - 71	pag. 20
	Accessories		pag. 21
	Battery - Charger		pag. 22

Itipack.
The new era of strapping tools.



Providing advanced,
custom solutions
to industries
with specific and
unique manufacturing
requirements.

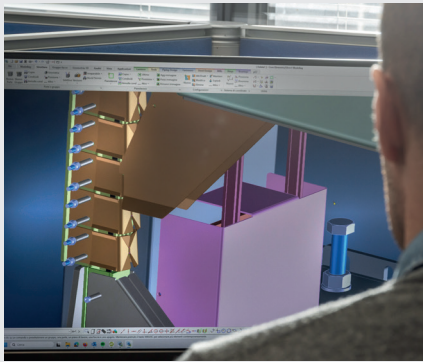

Since 1970, Itipack has been designing and manufacturing strapping systems to ensure packaging security and the safe transport of goods worldwide. Driven by a constant focus on reliability and performance, we provide tailored solutions for every industry and application. Itipack stands for solidity and stability: a 15.000 sq.m production facility, hundreds of machines produced every year, and continuous investment in advanced technologies that strengthen our global market position. Our fully integrated organization combines R&D, design, production, assembly and after-sales services to deliver innovative, high-quality solutions that set industry standards and create long-term value for customers.



Evolution

Battery strapping tools For **PP & PET** strap

FEATURES

ITI EVO 13-16

3 Operating modes:
Automatic / Semi Automatic / Manual

Opening lever free

Soft & Standard tensioning mode

BENEFITS

- > Wide range & adjustable tension
- > Easy to be used
- > Ergonomic design & perfectly balanced
- > Friction weld and high seal efficiency
- > Strong and well protected motor housing
- > Li-Ion 18V - 5Ah battery

ITI EVO 13-16 (ITI 28)	
Strap Type	PP & PET (Smooth / Embossed)
Strap Width	13 mm / 16 mm
Strap Thickness	0,5 - 1,05 mm
Tension Force Range - Standard mode	650N / 2500N
Tension Force Range - Soft mode	300N / 525N
Tensioning Speed	11 mt / min
Battery	Li-Ion 18V - 5Ah
Dimensions	330x140x142 mm
Weight (with battery)	4,6 kg
Sealing	Friction weld sealing
Joint Strength	75% of breaking strength (Variable according to the strap type and quality)



CODE	DESCRIPTION
77T2199970	Only tool - no battery
77T2199971	Tool with 1 battery and 1 charger
77T2199972	Tool with 2 batteries and 1 charger
77T2199973	Tool with 3 batteries and 1 charger



Fully automatic battery tools

New

For **PP & PET** strap
Three operating modes

FEATURES

3 Operating modes:
Automatic / Semi Automatic / Manual

Easy to be used


Digital control panel

Brushless motor technology

BENEFITS

- > Wide range of straps & Adjustable tension
- > Lightweight and well balanced
- > One hand operating tools
- > Easy access to wearing parts
- > Strong and well protected motor housing
- > **NEW!** Li-Ion 18V - 5Ah battery (ITI 24 - ITI 25)
- > Higher number of duty cycles

	ITI 24 - 18V	ITI 25 - 18V	ITI 27
Strap Type	PP & PET (Smooth / Embossed)		
Strap Width	13 mm / 16 mm	16 mm / 19 mm	19 mm / 25 mm / 32 mm
Tension Force - Min	300N	500N	2700N
Tension Force - Max	2500N	4500N	7000N
Tensioning Speed	10 - 16 mt / min	10 - 12 mt / min	8 mt / min
Battery	Li-Ion 18V - 5Ah	Li-Ion 18V - 5Ah	Li-Ion 36V - 2,5Ah
Dimensions	340x150x160 mm	340x150x160 mm	300x150x200 mm
Weight (with battery)	4,5 kg	4,5 kg	6,4 kg
Sealing	Friction weld sealing		
Joint Strength	75% of breaking strength (Variable according to the strap type and quality)		

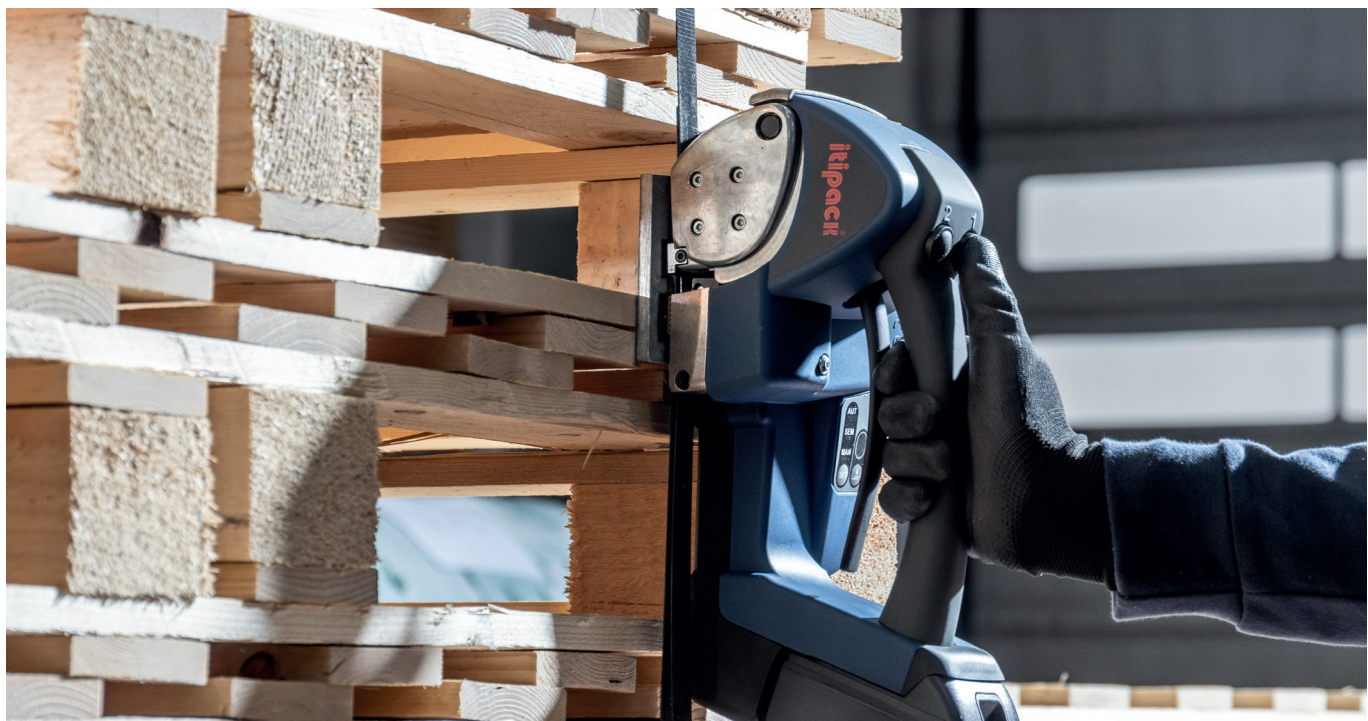

ITI 24 - 18V



STRAP TYPE	WIDTH	THICKNESS
PP - PET	13 - 16 mm	0,5 - 1,05 mm

CODE	DESCRIPTION
77T2499970	Only tool - no battery
77T2499971	Tool with 1 battery and 1 charger
77T2499972	Tool with 2 batteries and 1 charger
77T2499973	Tool with 3 batteries and 1 charger
77T2499974	Tool with 4 batteries and 1 charger

ITI 25 - 18V



STRAP TYPE	WIDTH	THICKNESS
PP - PET	16 - 19 mm	0,8 - 1,05 mm

CODE	DESCRIPTION
77T2599970	Only tool - no battery
77T2599971	Tool with 1 battery and 1 charger
77T2599972	Tool with 2 batteries and 1 charger
77T2599973	Tool with 3 batteries and 1 charger

ITI 27



STRAP TYPE	WIDTH	THICKNESS
PP - PET	19* - 25 - 32 mm	0,8 - 1,40 mm

CODE	DESCRIPTION
77T279997	Tool with 1 battery and no charger
77T2799971	Tool with 1 battery and 1 charger
77T2799972	Tool with 2 batteries and 1 charger

* 19 mm Guidestrapp Kit available on request



Fully automatic battery tools

New

For **PP & PET** strap
Li-Ion 18V - 5Ah - Manual operating mode

FEATURES

- Manual operating mode
- Easy to be used
- Strap size change
- Without guide replacement
- Digital control panel

BENEFITS

- > Adjustable tension
- > Lightweight and one hand operating tool
- > Friction weld and high seal efficiency
- > Strong and well protected motor housing
- > **NEW!** Li-Ion 18V - 5Ah battery
- > Higher number of duty cycles

	ITI 20 - 18V	ITI 21 - 18V	ITI 23 - 18V
Strap Type	PP & PET (Smooth / Embossed)		
Strap Width	13 mm / 16 mm	16 mm / 19 mm	16 mm / 19 mm
Tension Force - Min	600N	1100N	1900N
Tension Force - Max	2200N	3500N	5000N
Tensioning Speed	12 mt / min		
Battery	Li-Ion 18V - 5Ah	Li-Ion 18V - 5Ah	Li-Ion 18V - 5Ah
Dimensions	300x140x185 mm	300x140x185 mm	300x140x185 mm
Weight (with battery)	4,2 kg	4,3 kg	4,3 kg
Sealing	Friction weld sealing		
Joint Strength	75% of breaking strength (Variable according to the strap type and quality)		



ITI 20 - 18V



STRAP TYPE	WIDTH	THICKNESS
PP - PET	13 - 16 mm	0,5 - 1,05 mm

CODE	DESCRIPTION
77T2099970	Only tool - no battery
77T2099971	Tool with 1 battery and 1 charger
77T2099972	Tool with 2 batteries and 1 charger
77T2099973	Tool with 3 batteries and 1 charger

ITI 21 - 18V



STRAP TYPE	WIDTH	THICKNESS
PP - PET	16 - 19 mm	0,7 - 1,27 mm

CODE	DESCRIPTION
77T2199970	Only tool - no battery
77T2199971	Tool with 1 battery and 1 charger
77T2199972	Tool with 2 batteries and 1 charger
77T2199973	Tool with 3 batteries and 1 charger

ITI 23 - 18V



STRAP TYPE	WIDTH	THICKNESS
PP - PET	16 - 19 mm	0,8 - 1,27 mm

CODE	DESCRIPTION
77T2399970	Only tool - no battery
77T2399971	Tool with 1 battery and 1 charger
77T2399972	Tool with 2 batteries and 1 charger
77T2399973	Tool with 3 batteries and 1 charger



Entry level battery tool

For **PP & PET** strap
Manual operating mode

FEATURES

- Manual operating mode
- Adjustable tensioning force
- Adjustable welding time
- Digital control panel
- Strong and well protected motor housing

BENEFITS

- > Economical & easy to be used
- > High capacity 18V battery
- > Lightweight and one hand operating tools
- > Friction weld and high seal efficiency
- > Strap size change without guide replacement

ITI 22 - 18V



Strap Type	PP & PET (Smooth / Embossed)
Strap Width	13 mm / 16 mm
Tension Force - Min	600N
Tension Force - Max	1500N
Tensioning Speed	8 mt / min
Battery	Li-Ion 18V - 5Ah
Dimensions	316x140x160 mm
Weight (with battery)	4,1 kg
Sealing	Friction weld sealing
Joint Strength	75% of breaking strength (Variable according to the strap type and quality)

STRAP TYPE	WIDTH	THICKNESS
PP - PET	13 - 16 mm	0,5 - 1,05 mm

CODE	DESCRIPTION
77T2299970	Only tool - no battery
77T2299971	Tool with 1 battery and 1 charger
77T2299972	Tool with 2 batteries and 1 charger
77T2299973	Tool with 3 batteries and 1 charger





Pneumatic strapping tools

For **PP & PET** strap

FEATURES

- High resistance Aluminium Cast Body
- Durable and low maintenance required
- Suspension hook already equipped
- Suitable for a wide range of plastic strap


BENEFITS

- > Strong, Powerful and Reliable
- > Friction weld and high seal efficiency
- > Adjustable tension
- > Easy to be used, even with one hand

	ITI 10	ITI 11	ITI 12	ITI 14	ITI 18
Strap Type	PP & PET (Smooth / Embossed)				
Strap Width	10 / 13 / 16 / 19 mm	13 / 16 / 19 mm	16 / 19 mm	25 / 32 mm	16 / 19 mm
Tension Force - Max (6.5 bar)	2500N	3500N	5000N / 6000N	5000N / 6000N	only welding
Tensioning Speed	11 mt / min	9 mt / min	6 mt / min (5000N) 4 mt / min (6000N)	6 mt / min (5000N) 4 mt / min (6000N)	only welding
Pressure range	4,5 - 7 bar	4,5 - 7 bar	4,5 - 7 bar	6 - 7 bar	4,5 - 7 bar
Air consumption	Tensioning: 14 L/s				n.a.
Dimensions	280x150x175 mm	300x150x175 mm	300x150x175 mm	300x160x175 mm	250x130x120 mm
Weight	4,9 kg	5,6 kg	5,6 kg	5,8 kg	2,6 kg
Sealing	Friction weld sealing				
Joint Strength	75% of breaking strength (Variable according to the strap type and quality)				



ITI 10

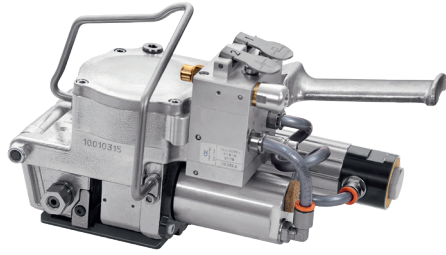


STRAP TYPE	WIDTH	THICKNESS
PP - PET	10 - 13 - 16 - 19 mm	0,4 - 1,2 mm

CODE	DESCRIPTION
77T101013	10mm width PP/PET - 2500N
77T101313	13mm width PP/PET - 2500N
77T109913	16/19mm width PP/PET - 2500N

Tensioning with friction system for all versions

ITI 11

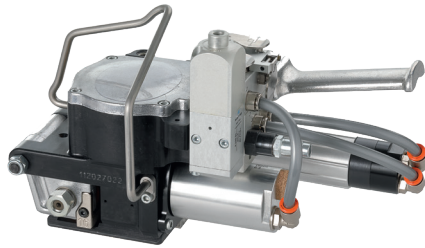


STRAP TYPE	WIDTH	THICKNESS
PP - PET	13 - 16 - 19 mm	0,7 - 1,4 mm

CODE	DESCRIPTION
77T111323	13mm width PP/PET - 3500N
77T119923	16/19mm width PP/PET - 3500N

13 mm version: tensioning with friction system


ITI 12

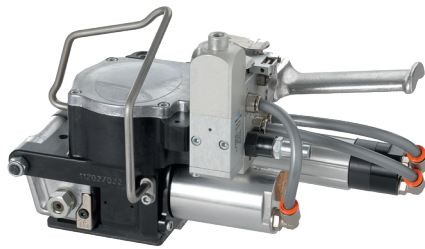

STRAP TYPE	WIDTH	THICKNESS
PP - PET	16 - 19 mm	1,0 - 1,4 mm

CODE	DESCRIPTION
77T129933	16/19mm width PP/PET - 5000N
77T129953	19mm width PET - 6000N


ITI 14

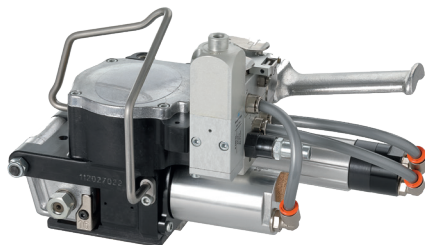

STRAP TYPE	WIDTH	THICKNESS
PP - PET	25 - 32 mm	0,8 - 1,27 mm

CODE	DESCRIPTION
77T149953	25/32mm width PET - 5800N

ITI 18



STRAP TYPE	WIDTH	THICKNESS
PP - PET	16 - 19 mm	0,4 - 1,4 mm

CODE	DESCRIPTION
77T189901	16/19mm width PP/PET

Combined pneumatic strapping tools

For **STEEL** strap


FEATURES

- Wide range of tools
- For complete range of steel straps
- Single or double notch
- Manual or automatic tension

BENEFITS

- > Robust and durable
- > Low Maintenance Required
- > Powerful and Fast
- > Suspension hook already equipped

	ITI 40	ITI 41	ITI 42	ITI 51	ITI 52	ITI 61	ITI 62
Strap Type	Steel Strap (Regular Duty & High Tensile)						
Strap Width	13 / 16 / 19 mm	19 / 25 / 32 mm		19 / 25 / 32 mm		19 / 25 / 32 mm	
Operation		3 buttons	2 buttons	3 buttons	2 buttons	3 buttons	2 buttons
Tension mode	Manual	Manual	Automatic	Manual	Automatic	Manual	Automatic
Sealing	Single notch	Double notch		UPCUT seal joint Double notch		Double notch	
Dimensions	350x140x170 mm	430x260x310 mm		430x260x310 mm		430x260x310 mm	
Weight	4,0 kg	10,3 kg		11,3 kg		11,3 kg	
Pressure range	5,5 - 7,0 bar	5,5 - 7,0 bar		5,5 - 7,0 bar		4,5 - 7,0 bar	
Air Consumption	Tensioning: 12 L/s - 25cuft / min						
Joint Strength	75% of breaking strength (Variable according to the strap type and quality)						

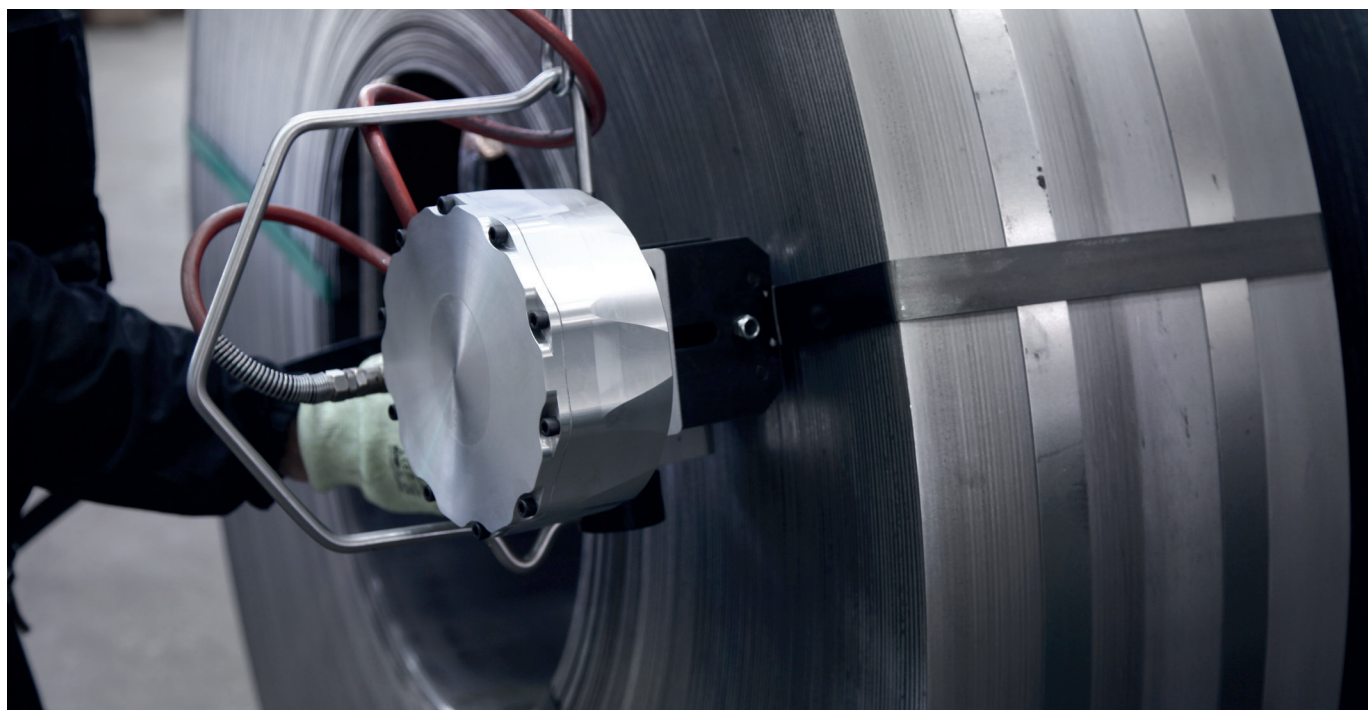

ITI 40

Manual Tensioning
Seal single notch



STRAP		PERFORMANCE	
WIDTH	THICKNESS	TENSION FORCE MAX	TENSIONING SPEED
13 mm	0,4 - 0,8 mm (Regular) 0,4 - 0,63 mm (HT)	2000N (6bar)	12 mt/min.
16 mm	0,4 - 0,8 mm (Regular) 0,4 - 0,63 mm (HT)	5500N (6bar)	5 mt/min.
19 mm	0,4 - 0,8 mm (Regular) 0,4 - 0,63 mm (HT)	7500N (6bar)	4 mt/min.

CODE	DESCRIPTION
77T401311	13mm width steel - 2000N
77T401321	13mm width steel - 5500N
77T401331	13mm width steel - 7500N
77T401611	16mm width steel - 2000N
77T401621	16mm width steel - 5500N
77T401631	16mm width steel - 7500N
77T401911	19mm width steel - 2000N
77T401921	19mm width steel - 5500N
77T401931	19mm width steel - 7500N

ITI 41 / ITI 42

Seal double notch



ITI 51 / ITI 52

Upcut double notch seal joint



ITI 61 / ITI 62

Low air pressure - Seal double notch



ITI 41 / ITI 51 / ITI 61 - Manual Tensioning / ITI 42 / ITI 52 / ITI 62 - Automatic Tensioning

STRAP		PERFORMANCE	
WIDTH	THICKNESS	TENSION FORCE MAX	TENSIONING SPEED
19 mm	0,6 - 1,0 mm (Regular) / 0,63 - 0,8 mm (HT)	9000N (6bar)	3,8 mt/min.
25 mm	0,6 - 1,0 mm (Regular) / 0,63 - 0,8 mm (HT)	15000N (6bar)	5,2 mt/min.
32 mm	0,6 - 1,0 mm (Regular) / 0,63 - 0,8 mm (HT)	15000N (6bar)	5,2 mt/min.

CODE	DESCRIPTION
77T411943	ITI 41 - 19mm width steel - 9000N - 3 buttons
77T412543	ITI 41 - 25mm width steel - 15000N - 3 buttons
77T413243	ITI 41 - 32mm width steel - 15000N - 3 buttons
77T413249	ITI 41 - 32mm width steel - 9000N - 3 buttons
77T421943	ITI 42 - 19mm width steel - 9000N - 2 buttons
77T422543	ITI 42 - 25mm width steel - 15000N - 2 buttons
77T423243	ITI 42 - 32mm width steel - 15000N - 2 buttons
77T423249	ITI 42 - 32mm width steel - 9000N - 2 buttons

CODE	DESCRIPTION
77T511943	ITI 51 - 19mm width steel - 9000N - 3 buttons
77T512543	ITI 51 - 19mm width steel - 9000N - 3 buttons
77T513243	ITI 51 - 32mm width steel - 9000N - 3 buttons
77T521943	ITI 52 - 19mm width steel - 9000N - 2 buttons
77T522543	ITI 52 - 25mm width steel - 15000N - 2 buttons
77T523243	ITI 52 - 32mm width steel - 15000N - 2 buttons
77T611943	ITI 61 - 19mm width steel - 9000N - 3 buttons (LPT)
77T613243	ITI 61 - 32mm width steel - 15000N - 3 buttons (LPT)
77T623243	ITI 62 - 32mm width steel - 15000N - 2 buttons (LPT)

At low pressure (4,5bar) - Max Tension force 7000N - Tensioning speed 4mt/min (LPT = low pressure tension)

Pneumatic tensioners and sealers

For **STEEL** strap



ITI 44SP

Special design with angled motor specifically studied for coils application

FEATURES

- Regular duty and high tensile steel straps
- Robust and durable
- Wide range of steel straps

BENEFITS

- > Lightweight and easy to be used
- > Strong, powerful and reliable
- > Low maintenance required

ITI 44 / ITI 44SP



POWER SUPPLY	TENSIONER
Strap Type	Steel (Standard & HT)
Strap Width	19 mm / 25 mm / 32 mm
Strap Thickness	0,6 - 1,1 mm
Tension Force - Max	15000N
Tensioning speed	6 mt / min
Pressure range	5,5 - 7 bar
Air consumption	12 L/s
Dimensions	340x115x90 mm (ITI 44) 230x115x250 mm (ITI 44SP)
Weight	4,3 kg
Sealing	n.a.
Joint Strength	n.a.

CODE	DESCRIPTION
77T449942	ITI 44 - 19/32mm width steel - 15000N
77T44SP	ITI 44 - Special 19/32mm width steel

ITI 45



POWER SUPPLY	SEALER
Strap Type	Steel (Standard & HT)
Strap Width	19 mm / 25 mm / 32 mm
Strap Thickness	0,6 - 1,1 mm (standard) 0,63 - 0,9 mm (HT)
Tension Force - Max	n.a.
Tensioning speed	n.a.
Pressure range	5,5 - 7 bar
Air consumption	12 L/s
Dimensions	320x140x180 mm
Weight	2,9 kg
Sealing	Single notch
Joint Strength	75% of breaking strength (Variable according to the strap type and quality)

CODE	DESCRIPTION
77T451901	ITI 45 - 19mm width steel
77T452501	ITI 45 - 25mm width steel
77T453201	ITI 45 - 32mm width steel



Pneumatic tensioners and sealers

For **STEEL** strap

FEATURES

- Battery operated tools
- Regular duty & high tensile steel strap
- Strong and powerful
- Reliable, robust and durable

BENEFITS

- > No air connection required
- > Adjustable tension (ITI 84)
- > Double notch sealing (ITI 85)
- > Easy to be used and low maintenance required

ITI 84 / ITI 84SP



POWER SUPPLY	TENSIONER
Strap Type	Steel (Standard & HT)
Strap Width	19 mm / 25 mm / 32 mm
Strap Thickness	0,6 - 1,1 mm
Tension Force - Max	5000N - 13000N
Tensioning speed	3 mt / min
Battery	Li-Ion 18V - 5Ah
Dimensions	395x120x130 mm
Weight	4,7 kg (with battery)
Sealing	n.a.
Joint Strength	n.a.


CODE	DESCRIPTION
77T8499971	Tool with 1 battery and 1 charger
77T8499972	Tool with 2 batteries and 1 charger
77T8499973	Tool with 3 batteries and 1 charger

ITI 85



POWER SUPPLY	SEALER
Strap Type	Steel (Standard & HT)
Strap Width	19 mm / 25 mm / 32 mm
Strap Thickness	0,6 - 1,1 mm (standard) 0,63 - 0,9 mm (HT)
Tension Force - Max	n.a.
Tensioning speed	n.a.
Battery	Li-Ion 18V - 5Ah
Dimensions	350x100x260 mm
Weight	4,5 kg (with battery)
Sealing	Seal Double Notch
Joint Strength	75% of breaking strength (Variable according to the strap type and quality)

CODE	DESCRIPTION
77T85329712	Tool with 1 battery and 1 charger

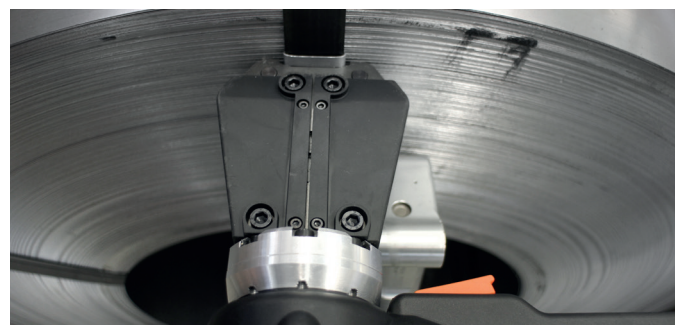

Manual tools

For **STEEL** strap

FEATURES

- Lightweight
- Strong and reliable
- Robust and durable

BENEFITS

- > Economical
- > Easy to be used
- > Low maintenance required

ITI 30

Manual sealles tool



Strap Type	Steel 13/16/19mm
Strap Thickness	0,45 - 0,7 (Regular Duty) 0,45 - 0,63 (High Tensile)
Tension Force - Max	6000N
Sealing	Sealless
Joint Strength	75% of breaking strength (Variable according to the strap type and quality)
Gear ratio	1:18
Dimensions	350x140x260 mm
Weight	4,4 kg

CODE	DESCRIPTION
77T309909	13/16/19mm steel strap manual tool

ITI 36



POWER SUPPLY	MANUAL TENSIONER
Strap Type	Steel (Standard & HT)
Strap Width	19 mm / 25 mm / 32 mm
Strap Thickness	0,6 - 1,1 (Regular Duty) 0,63 - 0,9 (High Tensile)
Sealing	n.a.
Joint Strength	n.a.
Dimensions	500x130x360 mm
Weight	4,6 kg

CODE	DESCRIPTION
77T369909	19/25/32 mm manual tool

ITI 37



POWER SUPPLY	MANUAL SEALER
Strap Type	Steel (Standard & HT)
Strap Width	32 mm
Strap Thickness	0,6 - 1,1 (Regular Duty) 0,63 - 0,9 (High Tensile)
Sealing	Single notch
Joint Strength	75% of breaking strength (Variable according to the strap type and quality)
Dimensions	610x50x165 mm
Weight	2,9 kg

CODE	DESCRIPTION
77T373209	32 mm manual tool



Tensioners

For **TEXTILE** strap

FEATURES

- Suitable for all textile strap up to 40mm
- Integrated cutting unit
- Robust and strong
- Aluminium cast body
- Adjustable tension

BENEFITS

- > Battery Operated Tool (ITI 71)
- > Powerful & quick
- > Easy to be used
- > Low maintenance required

ITI 70



POWER SUPPLY	PNEUMATIC
Strap Type	Textile (Woven & Composite)
Strap Width	16 mm - 40 mm
Strap Thickness	0,5 mm - 1,5 mm
Tension Force - Max	8000N
Tensioning speed	11 mt / min
Pressure range	5,5 - 7 bar
Air consumption	12 L/s
Dimensions	330x120x160 mm
Weight	4,8 kg

CODE	DESCRIPTION
77T709942	textile strap

ITI 71



POWER SUPPLY	BATTERY
Strap Type	Textile (Woven & Composite)
Strap Width	16 mm - 40 mm
Strap Thickness	0,5 mm - 1,5 mm
Tension Force - Max	11000N
Tensioning speed	6,5 mt / min
Battery	Li-Ion 18V - 5Ah
Dimensions	400x135x190 mm
Weight	5 kg (with battery)

CODE	DESCRIPTION
77T7199971	Tool with 1 battery and 1 charger
77T7199972	Tool with 2 batteries and 1 charger
77T7199973	Tool with 3 batteries and 1 charger



Accessories

Suspension Hook 2 positions


Fixed

SUITABLE FOR	CODE
ITI EVO	77A000225
ITI20 / ITI21 / ITI22 / ITI23	77A000116
ITI24 / ITI25 / ITI27	77A000155



Protection plate

SUITABLE FOR	CODE
ITI EVO	77A000234
ITI20 / ITI21 / ITI22 / ITI23	77A000137
ITI24 / ITI25	77A000189
ITI27	77A000158



Suspension Hook 3 positions

Fixed

SUITABLE FOR	CODE
ITI24 / ITI25	77A000160



Balancer

	SUITABLE FOR:	CODE
BALANCER 1,5 - 3 KG.	ITI18	77A000160
BALANCER 3 - 6 KG.	ITI10 / ITI11 / ITI12 / ITI14 / ITI20 / ITI21 / ITI22 / ITI23 / ITI24 / ITI25 / ITI EVO / ITI40 / ITI44	77S300BS1
BALANCER 9 - 14 KG.	ITI27 / ITI41 / ITI42 / ITI51 / ITI52 / ITI61 / ITI62	77S300BS3RI



Suspension Hook 3 positions

With friction

SUITABLE FOR	CODE
ITI24 / ITI25 / ITI27	77A000160



Vegetable case Suspension

SUITABLE FOR	CODE
ITI20 / ITI21 / ITI22 / ITI23	77A000151
ITI24 / ITI25	77A000159



Dryer unit


Filer, pressure adjustment and lubricator

SUITABLE FOR	CODE
All pneumatics	775100001



19 mm Guidestrap kit

SUITABLE FOR	CODE
ITI27	77A000227



Air spiral pipe

SUITABLE FOR	CODE
Tout pneumatique	77B100369



Buckle holder kit

SUITABLE FOR	CODE
ITI70 / ITI71	77A000161



Strap cutter

SUITABLE FOR	CODE
All plastic and steel strap	77S300024



Battery

Battery

Li-ion 18v - 5ah



SUITABLE FOR	CODE
ITI EVO / ITI20 / ITI21 / ITI22 / ITI23 ITI24 / ITI25 / ITI84 / ITI85 / ITI71	77B800580

Charger

Charger

Li-ion 18v



SUITABLE FOR	CODE
ITI EVO / ITI20 / ITI21 / ITI22 / ITI23 ITI24 / ITI25 / ITI84 / ITI85 / ITI71	77B800581

Battery-old

Li-po 14,8v - 2,2ah



SUITABLE FOR	CODE
ITI24-OLD	77A000176

Charger-old

Li-po 14,8v



SUITABLE FOR	CODE
ITI24-OLD / ITI25-OLD	77A000186

Battery-old


Li-po 14,8v - 3,6ah



SUITABLE FOR	CODE
ITI25-OLD	77A000175

Retrofit kit

To update ITI24 / ITI25
To the new 18v version



SUITABLE FOR	CODE
ITI24	77A000271A
ITI25	77A000272A

Battery

Li-ion 36v - 2,5ah



SUITABLE FOR	CODE
ITI27	77B800477

Charger

Li-ion 36v



SUITABLE FOR	CODE
ITI27	77B800560

Battery-old

Li-po 14,8v - 2,2ah



SUITABLE FOR	CODE
ITI20-OLD	77A000063

Charger-old

Li-po 14,8v



SUITABLE FOR	CODE
ITI20-OLD / ITI21-OLD / ITI23-OLD	77A000091

Battery-old


Li-po 14,8v - 3,3ah



SUITABLE FOR	CODE
ITI21-OLD / ITI23-OLD	77A000115

Retrofit kit

To update ITI20 / ITI21 / ITI23
To the new 18v version



SUITABLE FOR	CODE
ITI20	77A000253A
ITI21	77A000261A
ITI23	77A000262A



www.itipack.com

Strapping
what matters.



Via Capovilla, 73 - 36030 Villaverla (Vicenza) - Italy
T. +39.0445.855977 | info@itipack.it

www.itipack.com

